




A true 50/200 kHz dual frequency fishfinder at an incredibly low price


- ▶ The **Condor 245 df** sets new standards in compact fishfinder performance. Its powerful dual-frequency 50/200 kHz electronics, in combination with the high-sensitivity receiver, will allow depth performance never before seen in such an affordable fishfinder.
- ▶ The large, high-contrast, high-resolution screen of the **Condor 245 df** is perfectly viewable at any angle, even when wearing polarized sunglasses.
- ▶ A convenient menu system makes using the **Condor 245 df** very simple, providing quick access to all its advanced functions. These menus can be displayed in any of the 21 selectable languages available. A permanent internal memory preserves all settings, even when the unit is turned off. When you turn your **Condor 245 df** back on, all your favorite settings will still be there.
- ▶ The standard transom-mount, dual-frequency hydrodynamic-profile transducer is easy to install, and it has a wide cone angle, ideal for fishfinding, and a built-in temp sensor that provides precise surface water temperature readouts.

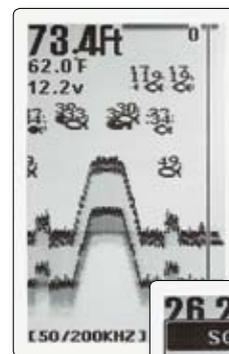

- ▶ When set for 50/200 kHz interlaced dual-frequency operating mode, the fish symbols appear on-screen in black or white, according to the frequency of the echo returns.



▶ 50/200 kHz transom transducer included.

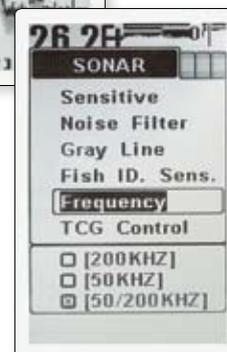


- ▶ The unit can be set for either single frequency operation, 50 kHz or 200 kHz, at your convenience, or for dual frequency as shown in this image.

Condor 245 df

50/200 kHz Fishfinder

► FEATURES

- Large, high contrast, 4.3" triple supertwist LCD screen
- High resolution 240 x 128 pixel with 4 levels of gray
- Operation frequency: 50/200 kHz
- Output power: 1800W (peak, 225W RMS)
- Depth capability of over 980 ft (300 m)*
- Sophisticated fish-recognition software that shows suspended targets, such as fish, on the screen as symbols with a digital depth readout
- Automatic range control
- InstanTrack™ shows in a column at right the instantaneous sonar returns in the form of signal-strength indicator bars
- Alarms: shallow water, fish, low battery
- Dual-function gray Shadeline™ bottom display, providing useful information about the nature of the water bottom
- High-intensity backlighting for night use
- Hydrodynamic transom-mount transducer, with built-in temp probe, standard feature, and suitable for high boating speed
- Coverage angle 12/35° @ -10dB (90° for fish searching)
- Outstanding depth performance, thanks to the high-sensitivity receiver, capable of revealing even the weakest echo signals from the column of water below the boat
- High-quality single-plug connector, with quick-release system, for rapid mounting and removal
- Tilting and swiveling base, standard feature, allows you to orient the unit at any angle and in any direction
- Multilingual menus with a choice of 21 languages
- Operation voltage: 12 V
- Dimensions: 7.5" x 4.3" x 3.9" (190 x 110 x 98 mm)

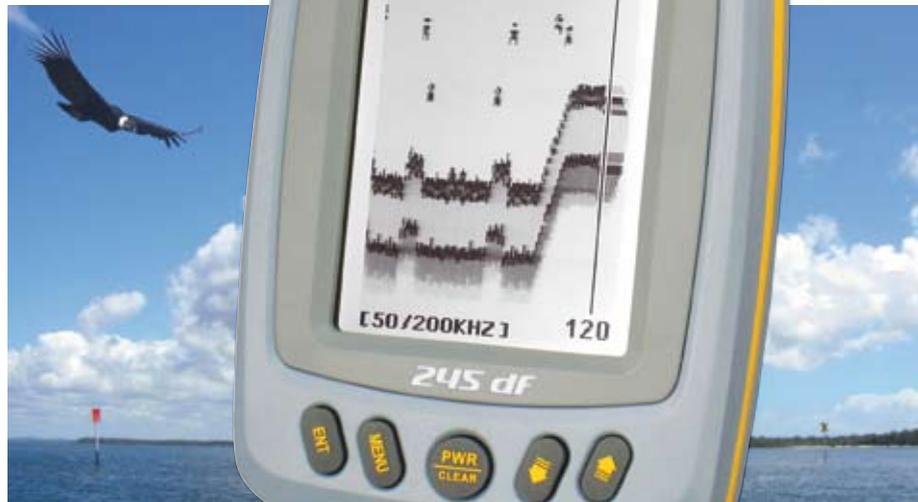

- The menu can be displayed in any of the 21 available languages: English, Spanish, French, German, Italian, Portuguese, Dutch, Norwegian, Swedish, Danish, Finnish, Polish, Hungarian, Russian, Turkish, Greek, etc.